


Part Number:







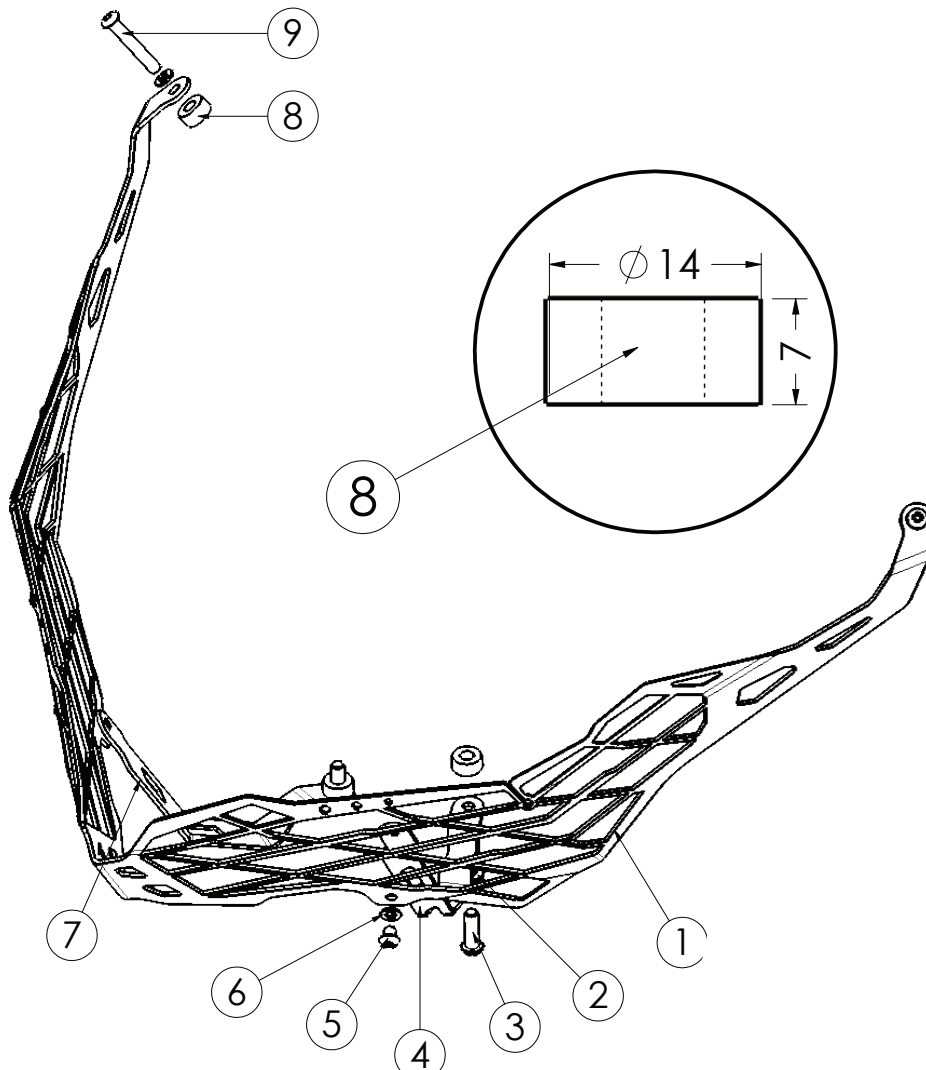


Part Description: HEAD LIGHT GUARD KAWASAKI VERSYS 650

Installation / Parts List / Bill of Material for Mounting






NO.	Description	Quantity	Torque*(N-M)	Remarks**
1	Head Light Guard	1		
2	Washer M6	2		
3	Socket button head screw M6x20mm	2		Use Liquid Thread Locker
4	AD B HLG	1		
5	Socket button head screw M5x6mm	2		Use Liquid Thread Locker
6	Washer M5	4		
7	AD B HLG	1		
8	Bush Delrin M6 14x7mm	4		
9	Socket button head screw M5x35mm	2		Use Liquid Thread Locker
SRC Design uses Metric System of Measurement and all dimensions in Millimeters				
Recommended to use the Torque specified in the table				
Denotes Usage of Liquid Thread Locker in specified Locations				



DESCRIPTION

1  Head Light Guard	2  Washer M6	3  Socket buttonhead screw M6x20mm
4  ADB HLG	5  Socket button head screw M5x6mm	6  Washer M5
7  ADB HLG	8  Bush Delrin M6 14x7mm	9  Socketbutton head screw M5x35mm


TOOLS REQUIRED

 Hex wrench ITEM NO. 4 mm	 Hex wrench ITEM NO. 5 mm	 socket wrench torque  Torque
 Thread locked		

Torque Values to be used in Mounting Instructions



code

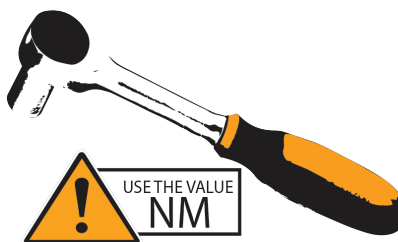


		M4		M5		M6		M8		M10		M12		M14		M16		M18	
	code	(cs)	(Fo)	(cs)	(Fo)	(cs)	(Fo)	(cs)	(Fo)	(cs)	(Fo)	(cs)	(Fo)	(cs)	(Fo)	(cs)	(Fo)	(cs)	(Fo)
Inox	A2	2.6	—	5.1	—	8.7	—	21.2	—	42	—	73	—	118	—	180	—	258	—
steel	8.8	3	3,594	5	5,886	10	8,302	23	15,242	46	24,275	79	35,401	127	48,618	198	66,955	283	83,746
steel	10.9	4	5,279	8.1	8,645	14	12,194	34	22,388	67	35,655	116	51,995	187	71,408	291	98,340	402	119,454

Tensile load (Fo)

The force in newtons (N) which maintains pressure contact between assembled components

Tightening torque (Cs) [values are in N-m]

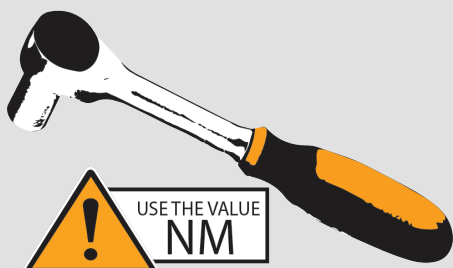

symbol (NM), refer to the reference value given in the table above for use in the required operation And safe in operation and accuracy in inserting parts.



The tool in the picture is (thread locked). When you see this mark, please insert the medicine to the point where the nut is to be inserted for the firmness and accuracy of the insertion work.




Please check and check again to make sure that all are inserted. Every piece and don't forget any step to be safe.

Installation steps



RIGHT (R)

LEFT (L)

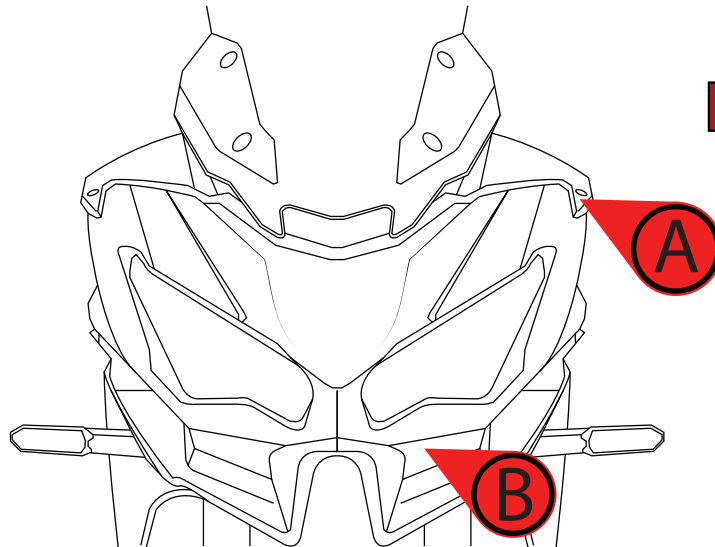



Step 1 RIGHT LEFT

Remove original screw.
according to illustration

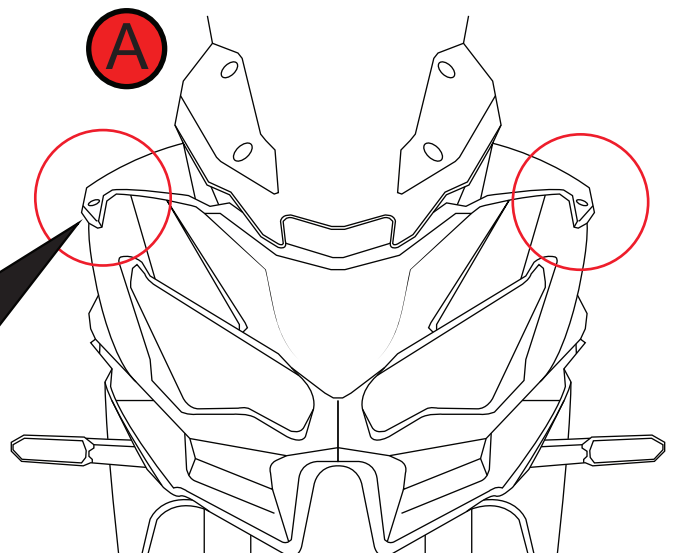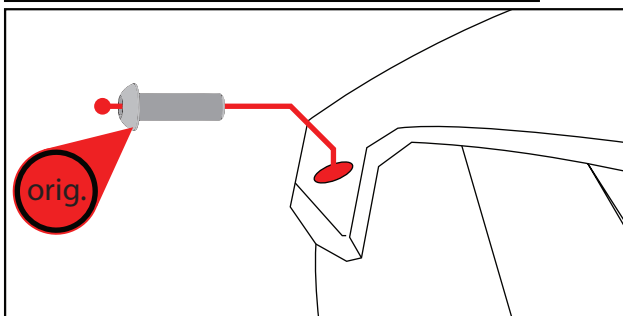

Step 2 RIGHT LEFT

Bring Upper bracket and screw
as shown in the illustration

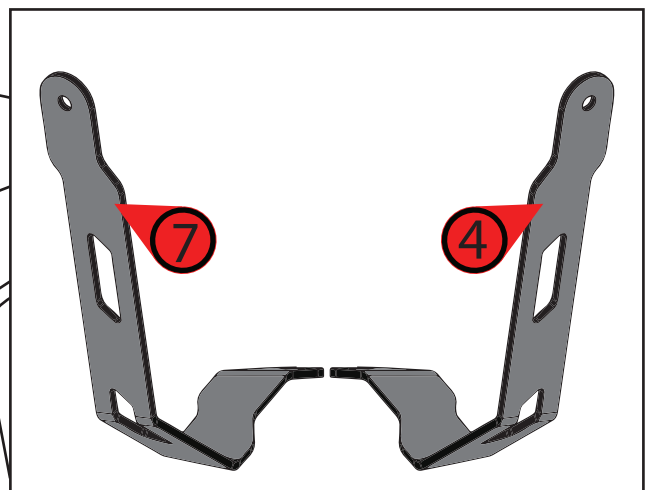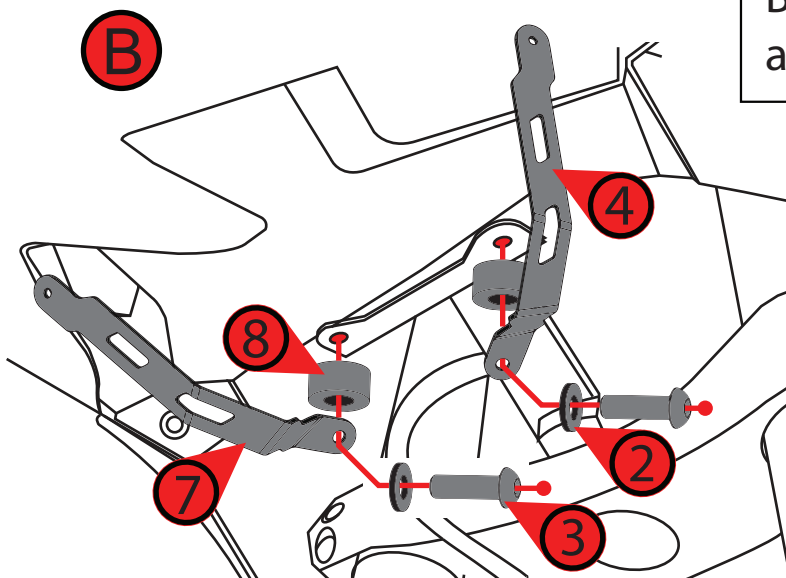



Installation steps

Step 3

RIGHT

LEFT

Install Head Light Guard, screw M5x35mm ,Washer,Bush Delrin as illustration

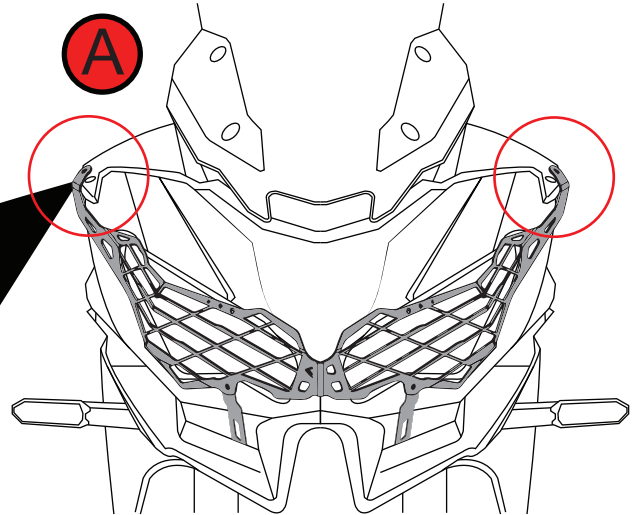
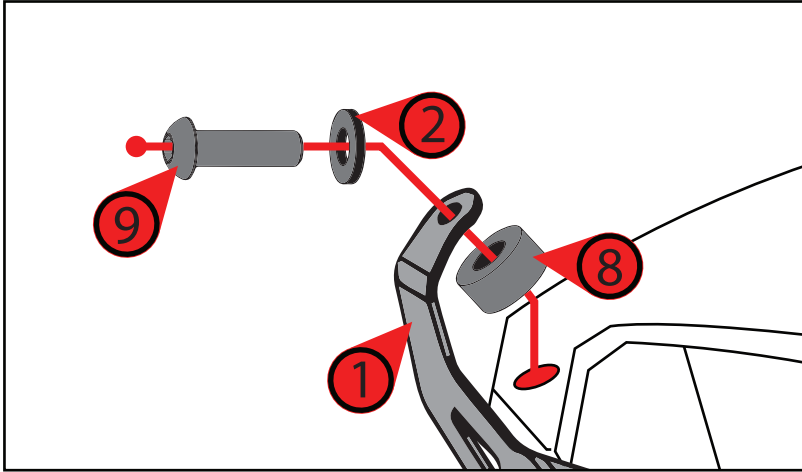


Step 4

LEFT

RIGHT

Install Head Light Guard, screw M5x6mm ,Washer as illustration

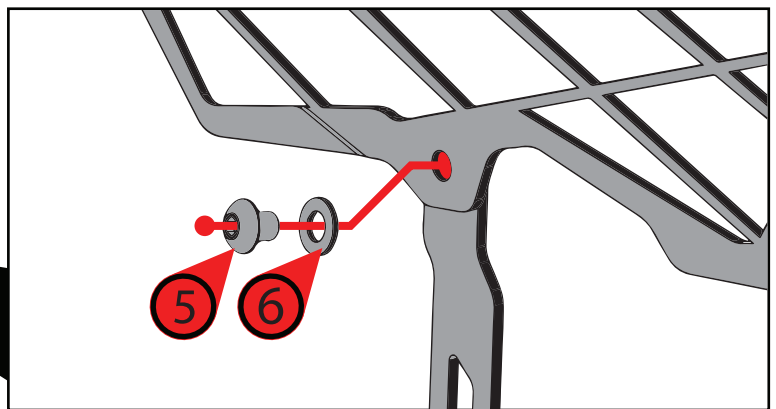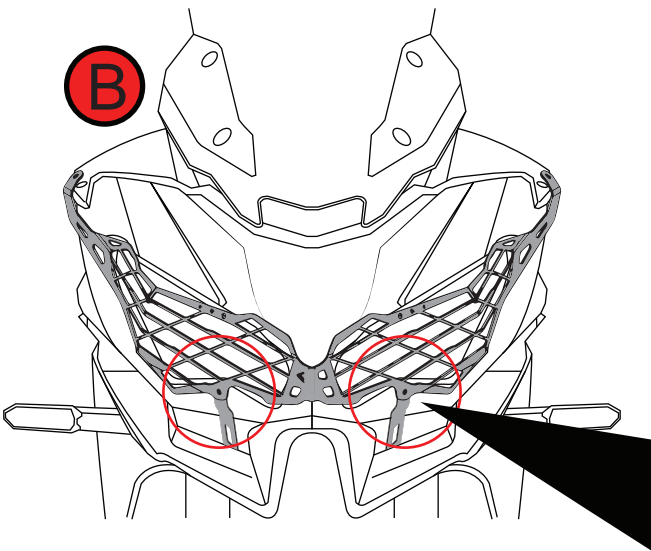

Make sure they are inserted correctly.

- (1.) We request you to pay attention to the Mounting Instructions in this document and follow the step-by-step procedures.
- (2.) This Mounting Instruction manual is a "Do It Yourself" (DIY) fitment manual of the Accessory part to the Vehicle. We have prepared this based on our experience and knowledge, related to the Vehicle, Part and its functional aspects
- (3.) SRC cannot guarantee the interchangeability of the parts to any other manufacturer's accessory part. It is advised to the User, to inspect and ensure the original state of all other Vehicle parts.
- (4.) We request you to bear in mind, that the Installed part can change the driving behaviour and/or the stability during driving or any other dynamic conditions.
- (5.) If you have the appropriate tools and another person to assist you in the mounting, it will help.
- (6.) After Completion of the Mounting and before taking on a First ride, Ensure and Check all functions of the Vehicle. It is always advised to check loosening of the fasteners after the first 50 kilo meters of ride and at regular intervals.
- (7.) To the maximum extent possible, our design use the current Mounting/Fitment of the Original Equipment, so that Installation of these accessories will not affect the Payload or Function of the Vehicle or the Part on which it is mounted to protect it.
- (8.) If any additional modifications are to be done, prior to the fitment of the accessories, it will be explicitly specified in the instruction sheets

